

ASSEMBLY

A9235 PRO SPEAK EVO
FOR TRIP



Remove the cheekpads as indicated in the helmet instruction manual.



Place the right speaker (R) in its seat after applying the adhesive round shaped Velcro included in the package.



Repeat the operations performed for the right (R) speaker for positioning the left one (L).


ASSEMBLY

A9235 PRO SPEAK EVO
FOR TRIP



4.

Place the microphone with wire on chin cover after applying the adhesive Velcro included in the package.

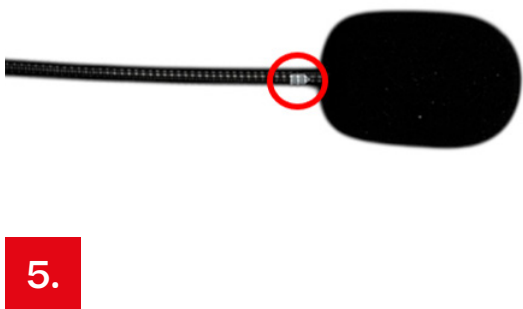

5.

Adjust the position of microphone by deforming its boom.

WARNING check that the triangle on the microphone is facing the mouth.



6.

House the speaker cables (connecting the right speaker to the left) behind the rear cushion.

ASSEMBLY

A9235 PRO SPEAK EVO
FOR TRIP



7.

Place the BT controller in the designated slot on the back of the inner shell.



8.

Place the USB socket between the removable cheekpads and the rear cushion.



9.

During the comfort cheekpads assembling, pass the flat cable of the remote control between the cheekpads pp plate and the shell. The remote control must remain accessible outside the helmet.

ASSEMBLY

A9235 PRO SPEAK EVO
FOR TRIP



10.

Fit the keypad on the left side (helmet on), approximately 5 mm from the lower edge of the shell using the provided adhesive.

Make sure that there is no interference with the chin guard and full contact surface between the adhesive keypad and the outer shell.