

ASSEMBLY INSTRUCTION

JUST SPEAK
WIRELESS COMMUNICATION
Bluetooth® **EVO**



Remove the anti-noise inserts by pulling them out of the chinstrap.



Place the right speaker (R) on the cheekpad's pp plate after applying the adhesive round shaped velcro included in the package.



Repeat the operations performed for the right (R) speaker for positioning the left (L).



Without pulling the chinstrap out of the cheekpads, pass the microphone cable and the flat cable of the remote control into the hole of the cheekpads.

ASSEMBLY INSTRUCTION


JUST SPEAK
WIRELESS COMMUNICATION
Bluetooth® **EVO**



Pass the flat cable of the remote control cable between the neckroll's pp plate and the shell. The remote control must remain accessible outside the helmet.



Place the base of the microphone under the cheekpads, place the microphone's boom in the seat ensuring that the neckroll pp plate has been previously positioned against the shell.

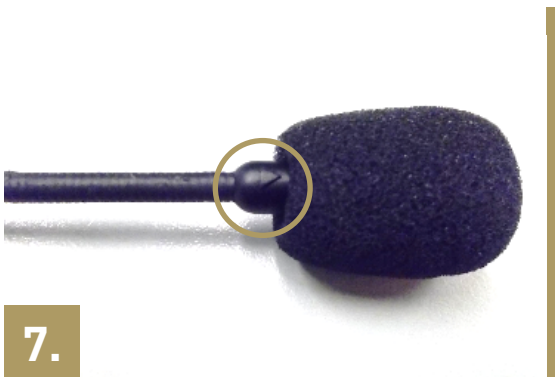

Adjust the microphone's position by deforming its boom.

WARNING: check that the triangle on the microphone is facing the mouth.



Place the USB socket between the cheekpad and the neckroll.

ASSEMBLY INSTRUCTION

JUST SPEAK
WIRELESS COMMUNICATION

Bluetooth®

EVO



House the cable that connects the right speaker to the left between the rear cushion and the neckroll.



Stick the remote control on the side of the shell verifying the correct adhesion.