




Powered by MIDLAND

POCKET GUIDE

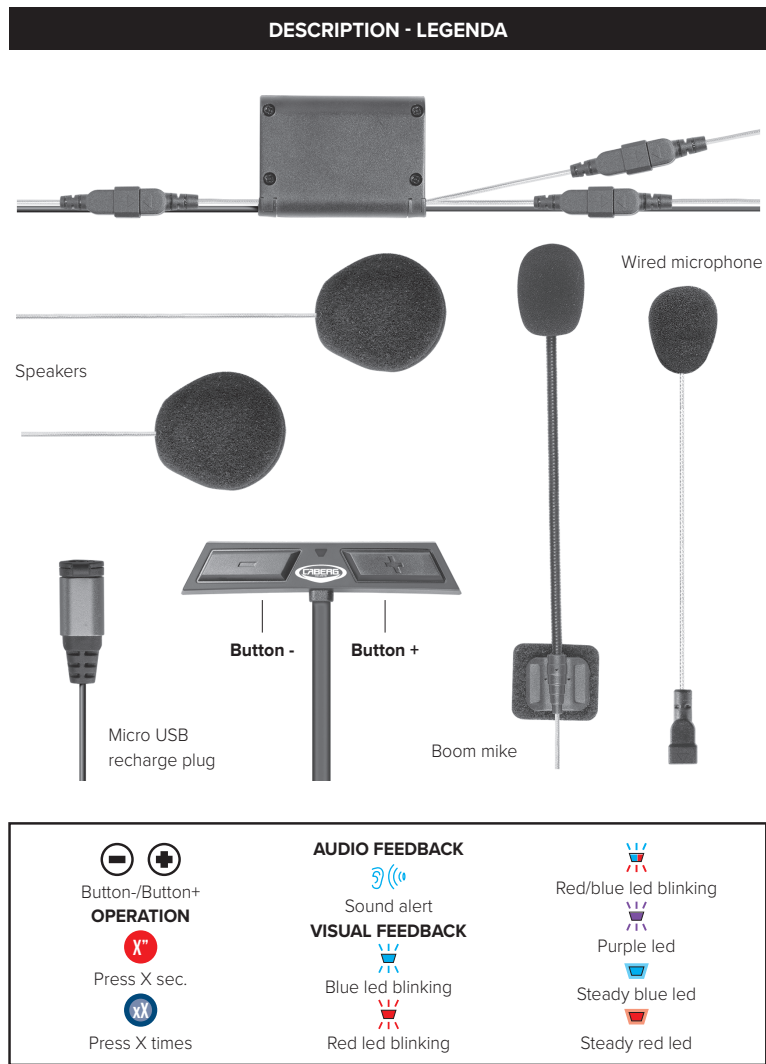

Button-/Button+
OPERATION
 Press X sec.
 Press X times

AUDIO FEEDBACK
 Sound alert
VISUAL FEEDBACK
 Blue led blinking
 Red led blinking

Red/blue led blinking
 Purple led
 Steady blue led
 Steady red led

POWER ON	
	Press 3 sec.
	Led Blinking
	"Power on"
	Battery status

POWER OFF	
	Press 3 sec.
	Led Blinking
	"Power off"

CHANGE LANGUAGE	
Status: unit on	
	Keep pressed for more than 7 seconds
	"Battery status" in the various languages. Release + button to select the desired one.

PAIRING TO PHONE/GPS	
Status: power off	
	Press 5 sec.
	Led blinks alternately
	Searching Bluetooth device on your phone. If needed, enter PIN code (0000).
	Four led blinkings
	"Pairing successful"
	"Device connected"

PAIRING WITH CABERG/OBI INTERCOMS OR COMPATIBLE MODELS	
Status: Both units powered on	
	Press 5 sec. on both devices
	"Pairing"
	Led blinks alternately on both devices
	Three led blinkings on both devices
	"Pairing successful"

Note: try this kind of pairing to verify whether your device is an OBI type or a compatible model; in case this procedure does not succeed, then follow the Universal Intercom pairing procedure

UNIVERSAL INTERCOM PAIRING (NON-OBI OR NON COMPATIBLE)	
Status: Both units powered on	
	Press 5 sec.
	Led blinks alternately
	"Pairing"
Follow the "phone" pairing procedure	
Both units stop flashing	
"Pairing successful"	

OPEN/CLOSE INTERCOM	
Status: units on and paired	
	Press once
	"Beep"
	Led blinks: audio active

RESET ALL PAIRINGS	
Status: power off	
	Press 7 sec.
	Steady led for 3 sec.
	"Beep"

VOICE CALL	
Status: unit on and connected to a phone	
	Press twice
	Voice assistant (Google assistant, Siri)
	Press twice to end the call


Note: Double click on + control -> Redial.

ANSWER A CALL	
Status: phone rings	
	Press once to answer a call
	Press once to end a call
	Press 3 sec. to reject a call

Note: To activate/deactivate the Auto Answer, when the device is switched on, press the + button for 5 seconds.

VOLUME ADJUSTMENT	
Status: while listening to an audio source (intercom, music, phone call...)	
	Keep pressed to increase the volume
	Keep pressed to decrease the volume

Frequency 2.4GHz
Max power 100mW



The power supplied by the battery charger must be between a minimum of 05 watts, required from the radio equipment, and 05 watts which gives the max charging speed.

MUSICA	
Status: unit on and connected to the phone	
	Select a music APP from the phone
	Press once Play/Pause
	Blinking
	Press twice Song forward
	Press twice Song backward

MUSIC SHARE	
Status: unit on	
	Select a music APP from the phone
	Press once Open intercom
	Press once Play music



Distributed by:
CABERG S.P.A.
Via Emilia, 11 - 24052 Azzano S. Paolo
Bergamo (Italy) - www.caberg.it
Read the instructions carefully before installation and use.

Produced or imported by:
MIDLAND EUROPE srl
Via R. Sevardi 7 - 42124 Reggio Emilia - Italy